

ŚRUBUNEK GZ-CU



Brass cone union male - Cu

MATERIAŁ:
UNE-EN 12165 CW617N

GWINT
UNE-EN ISO 228

MAKSYMALNE CIŚNIENIE ROBOCZE
25 bar

MAKSYMALNA TEMPERATURA ROBOCZA
110 °C

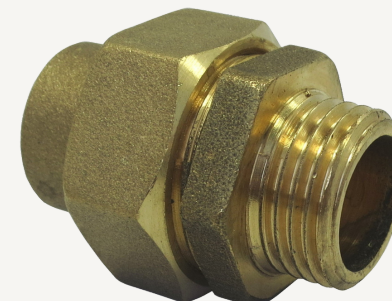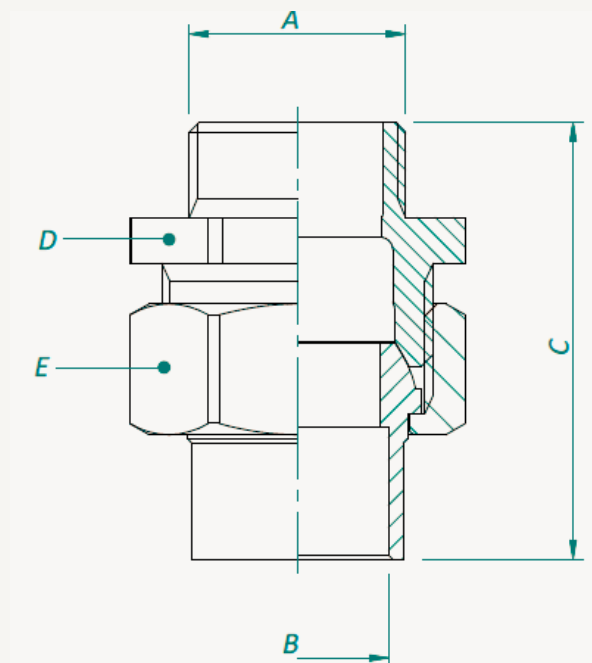

INDEKS	ROZMIAR	A	B	C	D	E
200.150	½" x 15	G ½	Ø 15 D9	39	HEX. 22	HEX. 23
200.151	¾" x 15	G ¾	Ø 15 D9	43,5	HEX. 28	HEX. 30
200.152	½" x 18	G ½	Ø 18 D9	42	HEX. 27	HEX. 29
200.153	¾" x 18	G ¾	Ø 18 D9	45,5	HEX. 28	HEX. 30
200.154	¾" x 22	G ¾	Ø 22 D9	48	OCT. 34	HEX. 36
200.155	1" x 22	G 1	Ø 22 D9	50,5	HEX. 38	HEX. 36
200.156	1" x 28	G 1	Ø 28 D9	56	HEX. 44	HEX. 45

wymiary nominalne (w mm) podlegają tolerancjom wykonawczym i modyfikacjom zgodnie ze standardami dostawcy
nominal dimensions (in mm) are subjected to processing tolerances and modifications under supplier's standards