

## REDUKCJA MUFOWO-NYPLOWA


Brass reducing hexagon union M-F

### MATERIAŁ:

UNE-EN 12165 CW617N (1)  
UNE-EN 1982 CB753S (2)  
UNE-EN 12164 CW614N (3)

### GWINT:

ISO 228

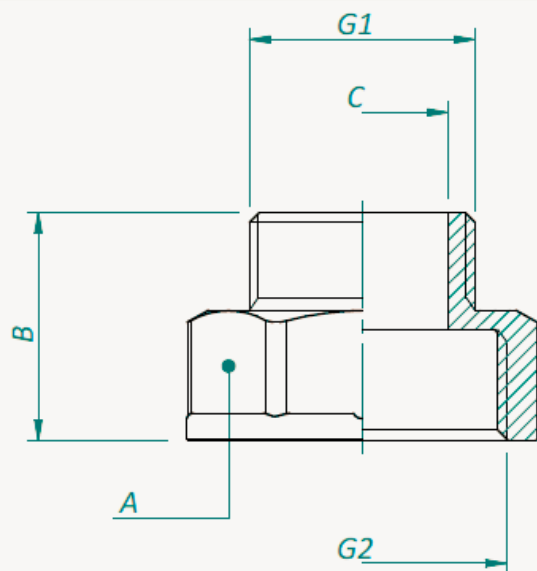

| INDEKS    | ROZMIAR                               | G 1               | G 2               | A       | B    | Ø C  | MATERIAŁ |
|-----------|---------------------------------------|-------------------|-------------------|---------|------|------|----------|
| 100.120   | $\frac{3}{8}$ " x $\frac{1}{2}$ "     | G $\frac{3}{8}$   | G $\frac{1}{2}$   | HEX. 24 | 22,8 | 12   | 1        |
| 100.120.1 | $\frac{1}{4}$ " x $\frac{3}{8}$ "     | G $\frac{1}{4}$   | G $\frac{3}{8}$   | HEX. 19 | 21   | 8    | 3        |
| 100.121   | $\frac{1}{2}$ " x $\frac{3}{4}$ "     | G $\frac{1}{2}$   | G $\frac{3}{4}$   | HEX. 29 | 26,3 | 15,2 | 1        |
| 100.122   | $\frac{1}{2}$ " x 1"                  | G $\frac{1}{2}$   | G 1               | HEX. 36 | 28,5 | 15,2 | 1        |
| 100.123   | $\frac{3}{4}$ " x 1"                  | G $\frac{3}{4}$   | G 1               | HEX. 36 | 29,5 | 20,7 | 1        |
| 100.124   | 1" x 1 $\frac{1}{4}$ "                | G 1               | G 1 $\frac{1}{4}$ | HEX. 45 | 33,2 | 26,5 | 1        |
| 100.125   | 1 $\frac{1}{4}$ " x 1 $\frac{1}{2}$ " | G 1 $\frac{1}{4}$ | G 1 $\frac{1}{2}$ | HEX. 52 | 34,5 | 34,5 | 1        |
| 100.126   | 1" x 1 $\frac{1}{2}$ "                | G 1               | G 1 $\frac{1}{2}$ | HEX. 52 | 35,2 | 26,5 | 1        |
| 100.127   | 1 $\frac{1}{4}$ " x 2"                | G 1 $\frac{1}{4}$ | G 2               | HEX. 64 | 36,5 | 34,5 | 1        |
| 100.128   | 1 $\frac{1}{2}$ " x 2"                | G 1 $\frac{1}{2}$ | G 2               | HEX. 64 | 37,5 | 39   | 1        |
| 100.129   | $\frac{3}{4}$ " x 1 $\frac{1}{4}$ "   | G $\frac{3}{4}$   | G 1 $\frac{1}{4}$ | HEX 45  | 32,5 | 20,7 | 1        |

wymiary nominalne (w mm) podlegają tolerancjom wykonawczym i modyfikacjom zgodnie ze standardami dostawcy  
nominal dimensions (in mm) are subjected to processing tolerances and modifications under supplier's standards