

ZŁĄCZKA PROSTA GZ- CU


Brass straight connector male - Cu

MATERIAŁ:

UNE-EN 12165 CW617N (1)
UNE-EN 1982 CB753S (2)

GWINT:

UNE-EN ISO 228-1

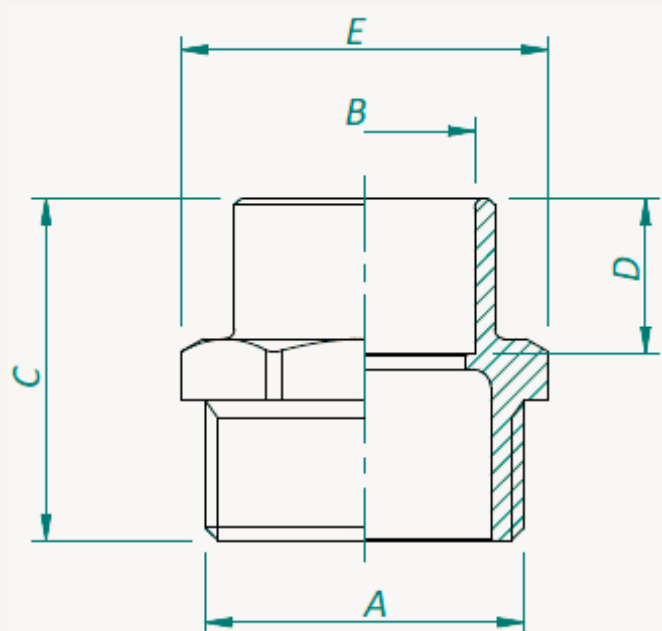

INDEKS	ROZMIAR	A	B	C	D	E	MATERIAŁ
200.070	½" x 15	G ½	Ø 15 D9	23,7	10,7	HEX. 22	1
200.071	¾" x 15	G ¾	Ø 15 D9	26	10,7	HEX. 27	1
200.072	½" x 18	G ½	Ø 18 D9	24,7	12,6	HEX. 22	1
200.073	¾" x 18	G ¾	Ø 18 D9	28	12,7	HEX. 27	1
200.074	½" x 22	G ½	Ø 22 D9	29	15,5	HEX. 27	1
200.075	¾" x 22	G ¾	Ø 22 D9	28,7	15,5	HEX. 29	1
200.076	1" x 22	G 1	Ø 22 D9	34,9	15,5	HEX. 35	1
200.077	¾" x 28	G ¾	Ø 28 D9	33,2	18,5	OCT. 34	1
200.078	1" x 28	G 1	Ø 28 D9	33,4	18,5	HEX. 35	1
200.079	1 ¼" x 35	G 1 ¼	Ø 35 D9	41	23	OCT. 45	1

wymiary nominalne (w mm) podlegają tolerancjom wykonawczym i modyfikacjom zgodnie ze standardami dostawcy
nominal dimensions (in mm) are subjected to processing tolerances and modifications under supplier's standards